

10<sup>th</sup> INTERNATIONAL CONGRESS ON TRANSPORTATION RESEARCH



#### **ICTR 2021**

September 1-3 Rhodes, Greece

### Forecasting impacts of Connected and Automated Transport Systems within the LEVITATE project

## **Apostolos Ziakopoulos**

Transportation Engineer, PhD

Together with:

J. Roussou, H. Boghani, B. Hu, M. Zach, K. Veisten, K. Johannes, L. Hartveit, M. Oikonomou, E. Vlahogianni, P. Thomas, G. Yannis



National Technical University of Athens Department of Transportation Planning and Engineering

## The LEVITATE Project


LEVITATE focuses on the development of a new impact assessment framework, in order to enable policymakers to manage the introduction of connected and automated transport systems, maximise the benefits and utilise the technologies to achieve societal objectives

Project partners: LOUGH (UK), AIT (AT), AIMSUN (ES), NTUA (EL), POLIS (BE), SWOV (NL), TOI (NO), TfGM (UK), City of Vienna (AT), QUT (AU), TJU (CN), UMTRI (US)

- Duration of the project:
   36 months (December 2018 December 2021)
- Framework Program: Horizon 2020 - The EU Union Framework Programme for Research and Innovation – Mobility for Growth





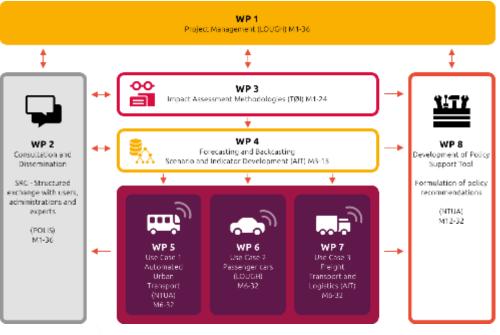



### Introduction


- Rapid technological advances leave limited margins for the preparation of cities in order to receive Connected and Automated Transport Systems (CATS).
- Automation technologies are expected to roll out in a rapid pace in all transport domains, including land transport modes such as passenger cars, urban public transport and freight transport.
  - The LEVITATE project endeavors to develop an
     open access web-based Policy Support Tool (PST)
     targeting Decision makers at all levels:
     Municipalities, Regional Authorities & National
     Governments.





## **PST Scope**

- To consolidate the outputs of different methods into an overall framework for the assessment of impacts, benefits and costs of CATS, for different automation and penetration levels and on different time horizons;
- To analyze user needs for a decision support tool aiming to assist in the analysis of urban policy scenarios and targets;
  - To develop and implement a toolkit and a decision support tool, allowing the testing of various policy scenarios on the basis of the needs of relevant stakeholders, incorporating both forecasting and backcasting approach;
    - To provide the respective policy recommendations.

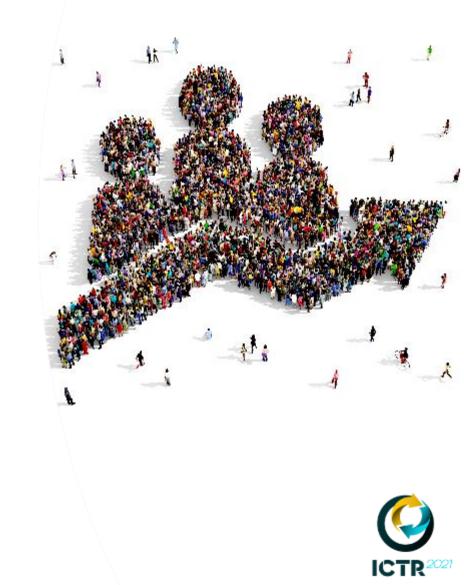



## **PST Components**

Three automation use cases are considered:

- Passenger cars
- Urban transport
- Freight transport
- Twenty examined impacts are considered, classified into three distinct categories:
  - Direct impacts,
  - Systemic impacts and
  - Wider impacts

#### Four scenarios of automation penetration are established:

- No automation base scenario
- Pessimistic base scenario
- Neutral base scenario
- Optimistic base scenario
- Three different methods used to provide inputs:
  - Microsimulation
  - Systems dynamics
  - Delphi method




# PST Methodologies (1/2)

- Microscopic simulation:
  - Impacts of CATS on traffic: travel times, flows, traffic emissions and road safety under several simulation scenarios
  - Influence of different CAV penetration rates on a microscopic level
  - AIMSUN software is used within LEVITATE, with inputs including road geometry and design, traffic volume, modal split, O-D matrices etc.

#### System Dynamics:

- Transportation systems that are undergoing transformation are considered
- Assess impacts of policy interventions (e.g., road use pricing/last-mile shuttles) during a transition period of increasing AV percentage
- Impacts are typically commuting distances, modal split and others as a function of time (or MPR per scenario)

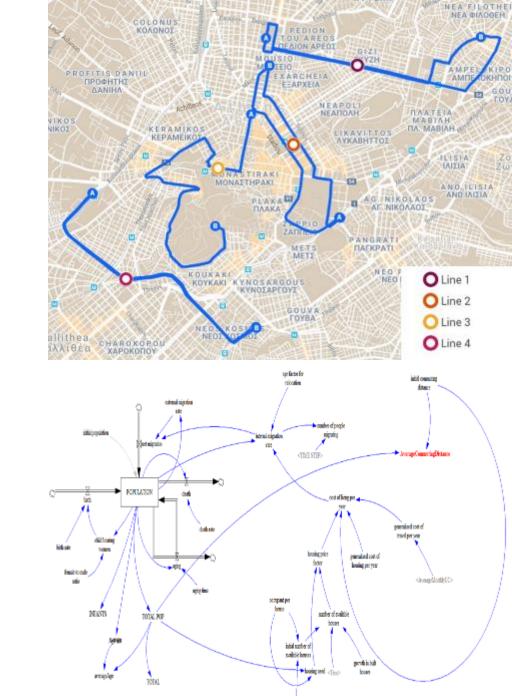





# PST Methodologies (2/2)

#### Delphi Panel:

- A process used to arrive at a collective, aggregate group opinion through an expert panel
- Used to obtain impacts that cannot be calculated by other quantitative methods
- Two-round 45-min questionnaires, regarding 2 to 4 automation interventions based on expertise
- Answers were aggregated as percentage change coefficients
- Mesoscopic simulation and operations research are implemented auxiliary for certain impacts (modal split using public transport/active travel) and freight-related impacts
  - All results are standardized, converted to percentage rates and are harmonized based on CATS market penetration rates

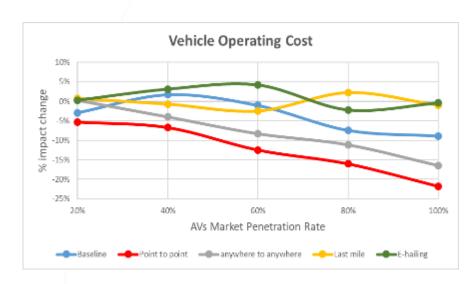

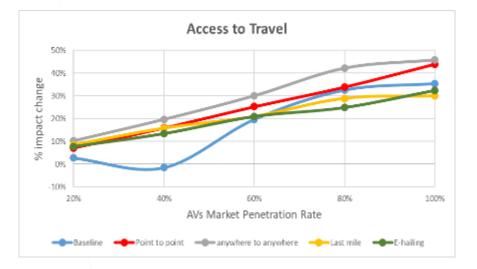







### **PST Structure**

- ≻ Static
- ≻Searchable
- > Components:
  - Bibliography
  - Results
  - Tools
  - Guidelines and policy recommendations

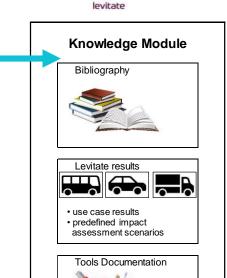

\*

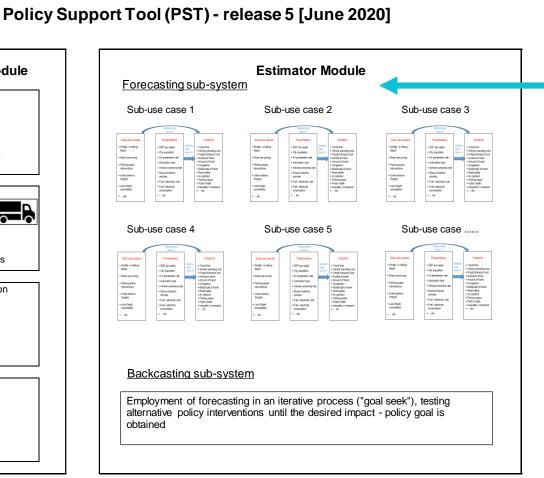







Guidelines

# Knowledge Module: Overview

#### 1. Bibliography: Relevant literature

- Systematic literature review
- The documentation of each sub-use case
- Short synopsis

#### 2. Project results: Case studies, impact assessments

- Information regarding the scenarios conditions
- Assumptions and limitations
- Showcasing of case study results

#### 3. Documentation of tools: Toolbox of Levitate methods

- Information regarding the methodological background
- Assumptions and limitations relevant to each methodology

#### 4. Guideline excerpts: Guidelines & policy recommendations

- Explanations and tutorials on the use of the PST overall recommendations to cities
- Additional recommendations from literature








## **Forecasting Estimator**


Step 1: Selection of Use Case and Sub-Use Case (SUC):







- Step 2: Definition of initial values
- Step 3: Definition of base scenario:









- Step 4: Details of sub use-case implementation
- Step 5: Estimation of forecasted impact indicator values for reference scenario
- > Step 6: Estimation of forecasted impact indicator values for intervention scenario
- Step 7: SUC impact estimation presentation of results



## Forecasting Estimator Example [1/2]

### **User Input**

- Selection of Passenger Cars use case, Parking pricing sub-use case and 67% park outside policy implementation,
- Selection of 2036 as implementation year and pessimistic automation scenario,
- Selection of initial values and details of sub-use case implementation.


Demo Park Pricing	1	
	Use Cose:	Passenger Cars *
	Sub-use Case:	Panking Pricing
	Policy Implementation:	Parking bon - park estaide (67%) or return to +
	Policy Implementation Year:	2006 +
	Automation ecenaria:	Boenario Z - Pessimistia *
- Parameters		Imports
ODP per aspita (4):		Traval time (min):
Annual GDP per capita change (%):		Average duration of a Site mip inside the city serve  Amount of travel (person - km):
Inflation (%.):		Person Mometres of Inset peryoar in an area
		Congestion (s/veh-km):
City Population (millions persons):		<ul> <li>Average delaye to traffic (socende per vehicle - kdometer) de o result of tigh traffic volume</li> </ul>
Annual City Population Change (%):		Parking space (m2/person):
Human-drives Vehicles (%):		<ul> <li>Required parking space is the ally centre per person</li> </ul>
		Read safety (Conflicts/veh-km):
1st Gen - Coutisus Al/s (%):		<ul> <li>Number of traffic conflicts per vehicle-klotteter driven persp. until erseb relation is detired)</li> </ul>
2nd Gen - Aggressive Alle (%):		NOX due to vehicles (g/veh-km):
Fuel Cost (C/It):		<ul> <li>Concentration of NOs polisions are granteeper vehicle-informater (due to road transport anit)</li> </ul>
		CO2 due to vehicles (g/veh-km):
Electricity cost (6/kWh):		<ul> <li>Conservation of CO2 publications grant per relative-hilometer (due to road transport orig)</li> </ul>
Fuel Consumption (8/160Km):		PN10 due to vehicles (g/veh-ker):
Electricity Consumption (kWh/100Km):		Concentration of PMID polytastrate grows per vehicle-intensity (due to read transport only)
	Sub	



## Forecasting Estimator Example [2/2]

#### Results

- Estimation of forecasted NOx due to vehicles impact indicator values for reference scenario (without SUC),
- Estimation of forecasted NOx due to vehicles impact indicator values for intervention scenario (with SUC),
- SUC NOx due to vehicles impact estimation – presentation of results.

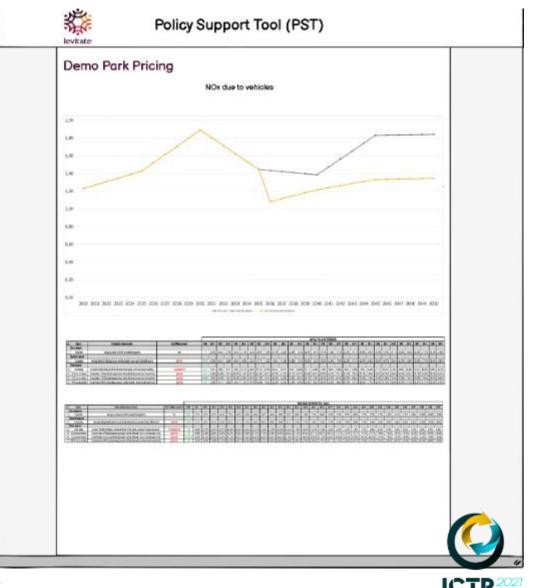



## **Backcasting Estimator**

- Functionality: The backcasting process is envisioned to be the inverse of forecasting, ie.:
   Set a vision, investigate how it can be reached.
- Projection: Are the selected measures enough or not?
- If not, define best possible attainable outcome.
- Measure combination: Using combined Impact Modification Factors (IMFs).
- Measure change: Option to substitute a measure for another midway once in the PST (e.g. Measure 1 performs better in low MPR, and Measure 2 performs better in high MPR).





# **Policy Intervention Combination**

Adopting and expanding the CMF Approach:

The creation of Impact Modification Factors (IMFs) and their combinations in pairs drawing from the US FHWA HSM philosophy for CMFs

- Additive method:  $IMF_c = 1 - [(1 - IMF_1) + (1 - IMF_2)]$
- Multiplicative method:  $IMF_c = IMF_1 * IMF_2$
- Dominant effect method:  $IMF_c = min(IMF_1, IMF_2)$
- Dominant common residuals method:  $IMF_c = (IMF_1 * IMF_2) \stackrel{min(IMF_1, IMF_2)}{min(IMF_1, IMF_2)}$
- Amplificatory method (not existing in FWHA):  $IMF_c = [IMF_1 * IMF_2]^2$





## **Combination Example**

- The case of two SUCs:
  - SUC<sub>1</sub>: <u>Parking pricing</u>→ Parking toll-balanced behavior
  - SUC<sub>2</sub>: <u>Provision of dedicated lanes</u>→ Motorway (outermost)
- > The CO<sub>2</sub> impacts on the year <u>2035</u> for the <u>pessimistic scenario</u>
- > The year of policy implementation is 2025
- User input is a baseline of 2000 g/veh-km

CO2, Base(SUC<sub>2</sub>), 2035=1043.49 g/veh-km CO2, SUC<sub>1</sub>, 2035=910.02 g/veh-km

 $IMF_1 = 1 - (910.02 - 1043.49) / 1043.49 = 0.8721$ 

CO2, Base(SUC2), 2035 = 1857.58 g/veh-km CO2, SUC<sub>2</sub>, 2035 = 1841.98 g/veh-km  $IMF_2 = 1 - (1841.98 - 1857.58) / 1857.58 = 0.9916$ 

#### **Additive method:**

 $IMF_{c} = 1 - [(1 - IMF_{1}) + (1 - IMF_{2})] = 1 - [(1 - 0.8721) + (1 - 0.9916)] = 0.8637$  $\rightarrow CO_{2, comb, 2035} = 2000 \text{ g/veh-km} * 0.8637 = 1727.39 \text{ g/veh-km}$ 





## Online PST pre-alpha version

Levitate Connected and Automated Transport Systems Policy Support Tool

#### HOME EXPLORE METHODOLOGY



#### FORECASTING

levitate 💥

The forecasting module, with the accompanying CBA sub-system, provides quantified and/or monetized output on the expected impacts of automation and CATS related policies, featuring customizability of parameter quantities.



#### BACKCASTING

The backcasting module, with the accompanying CBA sub-system, enables users to identify the sequences of CATS measures that are expected to result in their desired policy objectives and monetize their implementation.



#### KNOWLEDGE

The Knowledge module contains the repository and recommendations of the LEVITATE project, including documentation of the project toolbox, results of the various methods, relevant literature and excerps from CATS guidelines.

#### ABOUT LEVITATE

LEVITATE is building tools to help European cities, regions and national governments prepare for a future with increasing levels of automated vehicles in passenger cars, urban transport services and urban logistics.

#### HORIZON 2020 PROJECT

LEVITATE has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 824361.

#### CONTACT

Loughborough University (UK) Professor Pete Thomas – Transport Safety Research Group Loughborough University, LE11 3TU +44 (0)1509 226931 levitate@lboro.ac.uk




### **Future Developments**

- As the LEVITATE project moves forward, additional results and functionalities will be available for the PST user.
- Work conducted within the Road Safety Working Group of LEVITATE will allow for the addition of three crash categories (total crashes, fatal and VRU crashes).
- CBA capabilities are already being examined as an extension of the forecasting module database in order to monetize costs and benefits induced from the overall transformation of the transport networks.
- Overall, the Levitate PST aspires to become the go-to, one-stop-shop tool for the calculation of societal impacts of automation by experts, authorities, stakeholders and any other interested party.





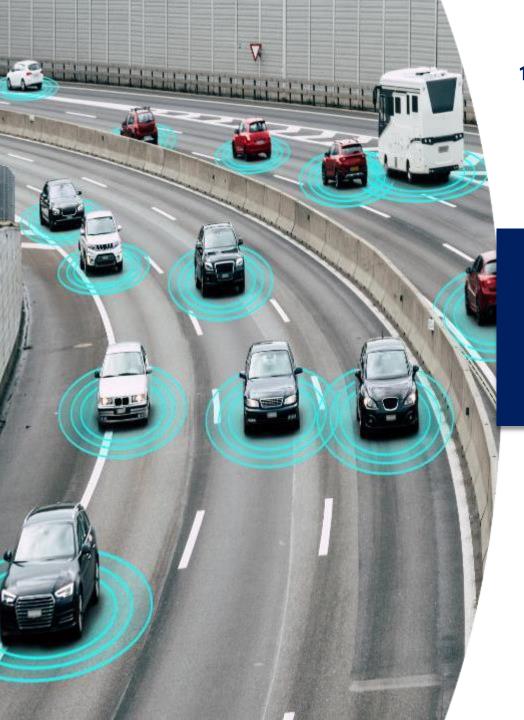

10<sup>th</sup> INTERNATIONAL CONGRESS ON TRANSPORTATION RESEARCH



#### **ICTR 2021**

September 1-3 Rhodes, Greece

### Forecasting impacts of Connected and Automated Transport Systems within the LEVITATE project

## **Apostolos Ziakopoulos**

Transportation Engineer, PhD

Together with:

J. Roussou, H. Boghani, B. Hu, M. Zach, K. Veisten, K. Johannes, L. Hartveit, M. Oikonomou, E. Vlahogianni, P. Thomas, G. Yannis



National Technical University of Athens Department of Transportation Planning and Engineering