

# Investigation of Accidents Involving Powered Two Wheelers and Bicycles – a European In-Depth Study

Laurie Brown<sup>a\*</sup>, Andrew Morris<sup>a</sup>, Pete Thomas<sup>a</sup>, Karthikeyan Ekambaram<sup>a1</sup>, Dimitris Margaritis<sup>b</sup>, Ragnhild Davidse<sup>c</sup>, Davide Shingo Usami<sup>d</sup>, Massimo Robibaro<sup>d</sup>, Luca Persia<sup>d</sup>, Ilona Buttler<sup>e</sup>, Apostolos Ziakopoulos<sup>f</sup>, Athanasios Theofilatos<sup>f 2</sup>, George Yannis<sup>f</sup>, Alain Martin<sup>g</sup>, Fallou Wadji<sup>g</sup>

<sup>a</sup> Transport Safety Research Centre, Loughborough Design School, Loughborough University, Epinal Way, Loughborough, Leicestershire, LE11 3TU, UK

<sup>b</sup> Hellenic Institute of Transport, Centre for Research and Technology Hellas (CERTH), 6th Km Charilaou - Thermi R, Thermi, Thessaloniki, Macedonia, 57001, Greece

<sup>c</sup> SWOV Institute for Road Safety Research, PO Box 93113, 2509 AC Den Haag, The Netherlands

<sup>d</sup> Centro di Ricerca per il Trasporto e la Logistica (CTL), Sapienza Università di Roma, Via Eudossiana, 18, 00184 (Roma), Italy

<sup>e</sup> Motor Transport Institute (ITS), 80 Jagiellońska Str., 03-301 Warsaw, Poland

<sup>f</sup> National Technical University of Athens, Department of Transportation Planning and Engineering, 5 Heron Polytechniou str., GR-15773, Zografou, Athens, Greece

<sup>g</sup> European Centre for Safety Studies and Risk Analysis (CEESAR), 132 rue des Suisses, 92000 Nanterre, France

\*Corresponding author: [l.a.brown2@lboro.ac.uk](mailto:l.a.brown2@lboro.ac.uk)

Loughborough Design School, Loughborough University, Epinal Way, Loughborough, Leicestershire, LE11 3TU, UK

## Acknowledgments

The SaferWheels study was funded by the European Commission under contract number MOVE/C4/2014-661-2. The information and views set out in this study are those of the authors and do not necessarily reflect the official opinion of the Commission. The Commission does not guarantee the accuracy of the data included in this study. Neither the Commission nor any person acting on the Commission's behalf may be held responsible for the use which may be made of the information contained therein.

The authors would like to offer a sincere thank you to all the road users who have kindly participated in the study. We would also like to thank our colleagues who provided expertise and support in collecting data, and DEKRA and ACEM for their support and advice. Finally, each team would like to thank the police forces, fire and rescue services, ambulance services, hospitals, coroners and government agencies who assisted them in providing access to data for this study.

## Declarations

Declarations of interest: none

Similar works by the authors:

- (1) Ziakopoulos, A., Theofilatos, A., Yannis, G., Margaritis, D., Thomas, P., Morris, A., Brown, L., Robibaro, M., Usami, D.S., Phan, V., Davidse, R., & Butler I. (2018). A preliminary analysis of in-depth accident data for powered two-wheelers and bicycles in Europe. In *International Research Council on the Biomechanics of Injury (IRCOBI)*. Athens, Greece.

The above conference paper is also based on the data collected in the current study. The current paper describes the data collection methods in detail and provides initial analysis of the data and discussion of the results with a focus on accident scenarios and causation. In contrast, the above paper describes analysis methods more than data collection methods and focuses primarily on accident characteristics and some additional statistical analyses undertaken.

---

<sup>1</sup> Present address: Institute for Future Transport and Cities, Coventry University, Priory St, Coventry, CV1 5FB, UK

<sup>2</sup> Present address: Transport and Urban Planning Group, School of Architecture, Building, and Civil Engineering Loughborough University, Epinal Way, Loughborough, Leicestershire, LE11 3TU, UK

- (2) Talbot R., Brown, L., Morris, A. (under review). Why are Powered Two Wheeler riders still fatally injured in road junction crashes? – A causation analysis.

The above paper, currently under review, reports analysis of a dataset that includes 21 cases from the study reported in the current paper. These are UK PTW cases only. The above paper uses the DREAM charts to analyse accident causation. It examines specifically the causes of fatal PTW accidents at junctions in the UK. The current paper however does not report on the DREAM charts in detail and discusses results of the full dataset as well as data collection methods.

# Investigation of Accidents Involving Powered Two Wheelers and Bicycles – a European In-Depth Study

## Abstract

### Introduction

Numbers of road fatalities have been falling throughout the European Union (EU) during the past 20 years and most Member States have achieved an overall reduction. Research has mainly focused on protecting car occupants, with car occupant fatalities reducing significantly. However, recently there has been a plateauing in fatalities amongst 'Vulnerable Road Users' (VRUs), and in 2016 accidents involving VRUs accounted for nearly half of all EU road deaths.

### Method

The SaferWheels study collected in-depth data on 500 accidents involving Powered Two-Wheelers (PTWs) and bicycles across 6 European countries. A standard in-depth accident investigation methodology was used by each team. The Driver Reliability and Error Analysis Method (DREAM) was used to systematically classify accident causation factors.

### Results

The most common causal factors related to errors in observation by the PTW/bicycle rider or the driver of the other vehicle, typically called 'looked but failed to see' accidents. Common scenarios involved the other vehicle turning or crossing in front of the PTW/bicycle. A quarter of serious or fatal injuries to PTW riders occurred in accidents where the rider lost control with no other vehicle involvement.

### Conclusions

Highly detailed data has been collected for 500 accidents involving PTWs or bicycles in the EU. This data can be further analysed by researchers on a case-study basis to gain detailed insights on such accidents. Preliminary analysis suggests that 'looked but failed to see' remains a common cause, and in many cases the actions of the other vehicle were the critical factor, though PTW rider speed or inexperience played a role in some cases.

### Practical Applications

The collected data can be analysed to better understand the characteristics and causes of accidents involving PTWs and bicycles in the EU. The results can be used to develop policies aimed at reducing road deaths and injuries to VRUs.

**Keywords;** vulnerable road user, motorcycle, collision investigation, crash causation, DREAM

## 1. Introduction

Road safety remains a major societal challenge within the European Union (EU). In 2016, 25,600 people died on the roads of Europe and 1.4 million people were injured (EC, 2018). Although there are variations between Member States, road fatalities have generally been falling throughout the EU until recent times. During the last few decades, measures to improve road accident prevention have predominantly focused on protecting car occupants to good effect as car occupant fatalities reduced by 44% during the period from 2007 to 2016 (EC, 2018).

However, at the same time the number of fatalities and injuries amongst other categories of road users has not fallen to the same extent, for example cyclist deaths decreased by only 0.4% on average in the EU between 2010 and 2018 (ETSC, 2020). Vulnerable Road Users (VRUs) are a priority and represent a real challenge for researchers working on accident prevention. Accidents involving VRUs comprised approximately 47% of all fatalities in the EU during 2016. Of these, Powered Two-Wheelers (PTWs) comprised 17% and cyclists 8% of the total numbers of fatalities (EC, 2018), though these proportions do vary between different countries.

Powered two-wheeler is the collective term for motorcycles, mopeds, light mopeds (also called mofas) and speed-pedelects. PTW use has continued to increase over the years, attracting road users for a variety of reasons such as their lower running costs and ability to easily move in and out of congested traffic (Haworth, 2012). However, there are also disadvantages associated with PTWs, for example they are lightweight and can lose control more easily than a car (Van Elslande & Elvik, 2012). Compared with some other vulnerable road users they can travel at high speeds and mix more closely with other traffic, making them one of the most vulnerable groups of road users and road accidents involving PTW riders are a major social concern.

Bicycle riders are also particularly vulnerable as they travel at lower speeds than motorised vehicles, can be difficult to see, and have little protection if they are involved in an accident. Unlike pedestrians with whom they share these characteristics, cyclists are often on the road mixing directly with other traffic with a higher speed differential, giving them an increased risk of being in an accident with a partner of greater mass.

For these reasons, the SaferWheels study aimed to investigate the causes of accidents involving PTWs and bicycles in Europe. An integral part of this study was that in-depth accident data was collected by trained investigators from six European countries using a common methodology.

The primary objectives of the SaferWheels study were; (1) collection of accident data for at least 500 accidents of which approximately 80% would involve PTWs and the remainder bicycles that collided with a motorised vehicle, (2) in-depth investigations to be carried out using a common established set of protocols based on a systemic approach to risk factor identification, and (3) analysis of the collected data to give an indication of the main accident typologies and causation factors.

It is noted here that the current study only investigated bicycle accidents where a motorised vehicle was involved. Bicycle only, bicycle-bicycle and bicycle-pedestrian accidents were not in the scope of this study, though research suggests such accidents account for a large number of serious and fatal injuries to cyclists that often go unreported (see for example Schepers, Stipdonk, Methorst & Olivier, 2017, Boele-Vos et al., 2017).

Several previous studies have examined the characteristics of motorcyclist safety. MAIDS (Motorcycle Accidents In-Depth Study), reported in ACEM (2009), carried out in-depth investigations of over 900 accidents involving PTWs in five sampling areas in the EU. The study concluded that the main cause of the majority of PTW accidents was rider or driver error, primarily due to driver inattention, temporary view obstructions or low PTW conspicuity (ACEM, 2009). Other studies have also explored factors affecting injury severity. For example, Albalade and Fernandez-Villadangos (2010) identified gender, excess speed, road width, and alcohol consumption as factors affecting PTW injury severity. Pai and Saleh (2008) determined that junction accidents resulted in more severe outcomes than those not at junctions, and that riding in dark conditions further increased severity. In a recent study, Theofilatos and Ziakopoulos (2018) found that traffic and speed variations increase PTW injury severity, while increased truck proportions in the traffic mix were found to reduce injury severity.

With respect to bicycle accidents, previous literature has identified some common scenarios and causes. Räsänen and Summala (1998) carried out an in-depth analysis of bicycle accidents and found that poor attention allocation and unjustified expectations of the behaviour of others were common causes. They also identified a common scenario involving a car driver turning right and coming into conflict with a cyclist on a cycle track. More recently, Wegman, Zhang and Dijkstra (2012) have explored methods to increase cycling in a population without also increasing fatalities and suggested a safe system approach would best protect vulnerable road users such as cyclists. Tripodi and Persia (2014) further promoted the use of e-safety applications and Information and Communication Technologies (ICT) in enhancing cyclist safety, as well as highlighting that different European countries have varied attitudes to cyclists and so will need different countermeasures.

## 2. Methodology

Data for the study was collected from sample regions in six EU countries (Table 1) to give a representative view of accidents in Europe. Together the countries accounted for 57% of PTW and 45% of cyclist fatalities in Europe in 2016 (EC, 2018). The sample regions were chosen to be as representative as possible of each country; the relationship between each sample region and the country's national population is described in more detail in Morris et al. (2018). The objective was to investigate 500 accidents comprising 80% PTW and 20% bicycle accidents, however these proportions varied for each sample region to be representative of their own accident population. Table 1 shows the estimated proportion of bicycle and PTW accidents aimed to be investigated by each team to achieve a representative sample for that region.

Country	Data collection region	Team proportion bicycle accidents	Team proportion PTW accidents
France	Essonne	12%	88%
Greece	Thessaloniki	4%	96%
Italy	Rome	2%	98%
The Netherlands	The Hague	49%	51%
Poland	Mazowieckie	53%	47%

United Kingdom	Midlands	46%	54%
----------------	----------	-----	-----

**Table 1: Study sampling areas**

The aim of the study was to investigate the causes of road accidents involving cyclists and PTWs in Europe, therefore only accidents which involved either a PTW or bicycle (or both) were examined. PTW accidents could either be single vehicle or involve a collision partner, however bicycle accidents were only within the sampling criteria if they were in collision with a motorised vehicle. The exception to this was e-bikes (bicycles that provide electrical support even when the cyclist does not pedal at all) and pedelecs (electrically assisted bicycles in which you have to pedal to get assistance), as these could be classified as motorised in their own right and so were included regardless of whether the accident included another motorised vehicle.

For investigation of accidents the study utilised the methodology defined by the DaCoTA project (Atalar, Talbot & Hill, 2012). The DaCoTA methodology was chosen because; (i) it is a comprehensive guide to conducting in-depth road accident investigations (ii) it has the capability to describe all involved road users in the accident; (iii) it has a manual including examples and recommended applications, and (iv) it allows all the investigation teams to use a harmonised methodology and thus make the results comparable.

The DaCoTA investigation methodology specifies two primary approaches to gathering information: 'On-Scene' and 'Retrospective'. In the 'On Scene' approach, investigators were notified of an accident by emergency services and attended the scene at the time to collect data. A 'Retrospective' approach was used when attendance at the accident was not possible. In this approach, the vehicles are examined after the accident (e.g. at recovery yards), the scene revisited, and road users approached for interviews. Accident investigation reports (including scene photos, vehicle examinations, driver/rider interviews etc.) from the emergency services are also obtained wherever possible.

The adapted SaferWheels methodology is described fully in Morris et al. (2018). Data was collected during the period of 2015 to 2017. Investigated accidents usually involved injury to the PTW or bicycle rider; however, a small sample of non-injury accidents were investigated if there was sufficient data available to form a useful case.

A purposive sampling method was adopted. This was based on the concept of saturation, defined as the point at which the data collection process no longer offers any new or relevant data. Case selection was random in all cases however there were limitations as not all accidents could be reached in time to investigate thoroughly. Furthermore, barriers such as data privacy issues, legal investigation, explicit refusal by involved parties, etc. prevented the investigation of some accidents. Due to these challenges, some teams relied on investigations of fatal and more serious accidents conducted by specialist police accident investigators ('retrospective' investigations). This did not reflect the true severity distribution of accidents that occur in those regions but was a result of the challenges of collecting in depth accident data.

## *2.1 Data specification*

Approximately 1,500 variables (or fields) per accident were gathered and were entered into a central database. Data were gathered for each element involved in the accident – for example, if the accident involved both a PTW and a passenger car, data were collected for both vehicles and both drivers. The following list illustrates the categories of variables included in the dataset:

- Accident (e.g. date and time, local environment, light and weather conditions)
- Road (e.g. road type, speed limit, road geometry, roadside furniture)
- Road user (e.g. age, gender, injury severity)
- PTW or bicycle (e.g. make and model, motor displacement, mechanical condition)
- Opponent vehicle(s) (e.g. type, make and model, general condition, safety technologies fitted)
- Causation analysis (e.g. speed, distraction, intoxication)
- Reconstruction analysis
- Injury descriptions (coded using the Abbreviated Injury Scale (AIS))
- Road user interviews

## *2.2 Accident causation classification*

Accident causation analysis was carried out using the Driving Reliability and Error Analysis Method (DREAM). DREAM allows investigators to systematically classify and store accident causation

information which has been gathered through in-depth investigations by providing a structured method of establishing the causal factors inherent within each accident into a set of formally defined categories of contributing factors.

DREAM originated from the Cognitive Reliability and Error Analysis Model (CREAM) (Hollnagel, 1998), which was used to analyse accidents in process control domains, becoming DREAM when it was adapted for use in road transport accidents (Ljung, 2002; Ljung, 2007). Warner, Ljung, Sandin, Johansson and Björklund (2008) developed DREAM further as part of the EC SafetyNet project, and version 3.2, the latest version, was created during the DaCoTA project where additional variables were added specifically relating to PTW accidents (Ljung et al., 2012).

DREAM 3.2 was selected as the preferred method of causation analysis in this study due to the success of previous application, the rigorously established theoretical background, and the structured approach of establishing accident causation specifically for PTWs (Phan et al., 2010).

### 3. Results

The 500 investigated accidents resulted in a total of 515 ‘cases’; some accidents involved a PTW and a bicycle so can be considered either a PTW case and/or a bicycle case for analysis purposes. The distribution of PTW and bicycle cases collected by each team is shown in **Error! Reference source not found.;Error! Reference source not found.** in total 77% (385) of the 500 accidents involved a PTW and 26% (130) involved a bicycle.

Team	PTW cases	Bicycle cases	Total
France	81	5	86
Greece	78	7	85
Italy	71	4	75
The Netherlands	57	43	100*
Poland	48	41	89*
The United Kingdom	50	30	80
<b>Total</b>	<b>385</b>	<b>130</b>	<b>515*</b>

\*Greater than the total accident number as some accidents involve PTWs and Bicycles

**Table 2: Distribution of cases collected by each investigation team**

For the overview analysis e-bikes and pedelecs were grouped with pedal cycles, since they were a small proportion of the sample (14 cases), and share similar characteristics in terms of being able to use cycle lanes, their visibility/conspicuity and that they generally travel at lower speeds than PTWs.

The distribution of injury severity for the different vehicle types is shown in the Table 3. Teams used the following injury severity classifications:

- Fatal: Death within 30 days of the road accident.
- Serious: Injured (not killed) and hospitalised for at least 24 hours.
- Slight: Injured (not killed) and hospitalised for less than 24 hours or not hospitalised.
- Not injured: Participated in the accident though not injured.

This classification was applied rather than the national definitions since definitions may vary between countries. The overall distribution comprises 36% (181) slight injury, 30% (149) serious injury and 17% (84) fatal injury accidents, with the remainder being no injury or unknown severity.

Vehicle Type	Non-Injury	Slight	Serious	Fatal	Unknown	Total
<b>PTW cases</b>	22 (5.7%)	134 (34.8%)	103 (26.8%)	69 (17.9%)	57 (14.8%)	385
<b>Bicycle cases</b>	1 (0.8%)	49 (37.7%)	59 (45.4%)	15 (11.5%)	6 (4.6%)	130
<b>All accidents</b>	23 (4.6%)	181 (36.2%)	149 (29.8%)	84 (16.8%)	63 (12.6%)	500

**Table 3: Maximum injury severity of all accidents, PTW cases, and bicycle cases**

#### 3.1 Accident scenarios

Analysis of the accident scenario was undertaken to look for trends or patterns. The analysis takes into consideration the number of vehicles/pedestrians involved in the accident, their manoeuvre, the positions of each road user prior to the accident, and their intended directions. For multi-vehicle

accidents, scenario groups were developed for analysis as shown in Figure 1, which were derived from the 'DaCoTA Accident Type' variable. Further descriptions of these scenarios are included in Appendix A. The main results of the accident scenario analysis are given below.

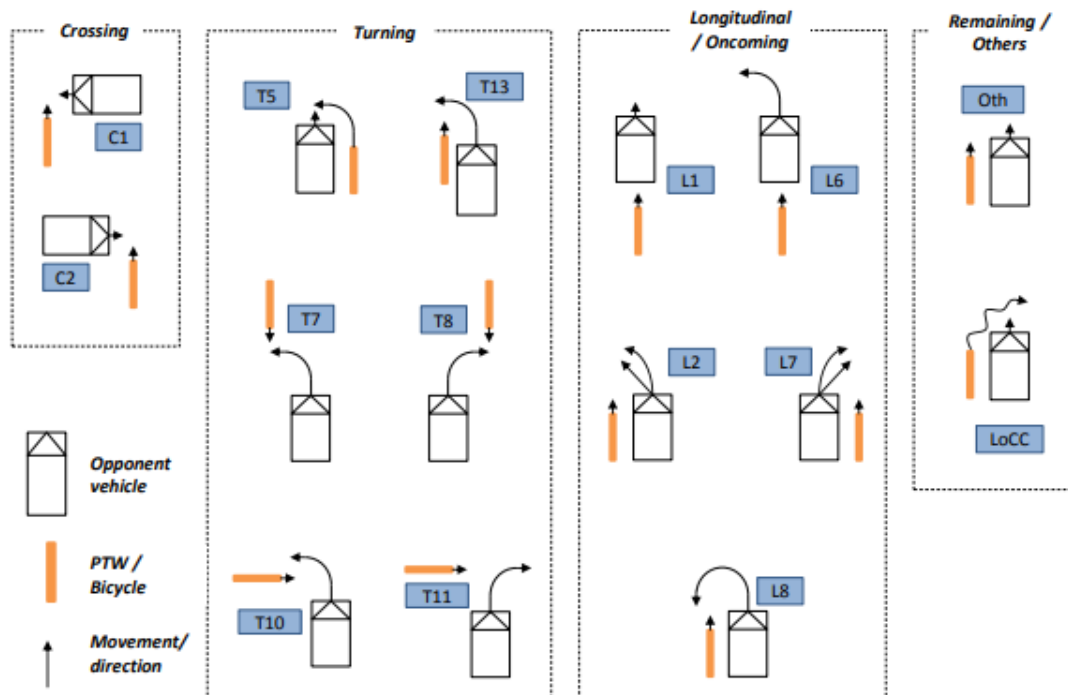


Figure 1: Grouped accident scenarios for PTW and bicycle accidents (source: Morris et al., 2018)

#### PTW cases:

25% of fatally and seriously injured PTW users were involved in a single vehicle PTW accident. 64% of these lost control of their vehicle on a curve. In comparison only 10% of slight injuries to PTW riders occurred from single vehicle accidents, though it is recognised there may be under-reporting in this area and this figure may not represent the true population.

The three most common accident scenarios for fatally and seriously injured PTW riders involved in a two-vehicle accident were: T7 (16%), C2 (13%) and Loss of Control on a Curve (LoCC - 9%). For slightly injured PTW riders, the two most common accident configurations were T7 (17%) and C1 (16%). The remaining accidents were evenly distributed among the other accident scenarios.

#### Bicycle cases:

The three most common accident scenarios for fatally and seriously injured bicycle riders involved in a two-vehicle accident were C1 (19%), C2 (19%) and T5 (7%). For slightly injured road users involved in a bicycle accident, the three most common accident scenarios differ somewhat; C2 was still the main accident configuration (18%), but the next most frequent were T8 (9%) and T11 (9%).

### 3.2 Road and environment characteristics

Both PTW and bicycle accidents tended to occur during daylight hours (respectively 78% and 81%). Similarly, most of the accidents occurred under fine dry conditions, with rain, snow or fog being present in less than 10% of cases. Most of the accidents occurred on urban roads (78% of PTW cases and 83% of bicycle cases), and within a speed limit of 50km/h or less (79% of all accidents).

Regarding junction-related accidents; 52% of PTW cases and 43% of bicycle cases did not occur at or within 20m of junctions. When considering all 500 accidents together, 50% occurred at junctions, which was most frequently at a T or Y junction (23%), or crossroads (21%).

### 3.3 Vehicle characteristics

The sample contains 393 PTW investigations from 385 PTW 'cases' as some accidents involved multiple PTWs. The most common PTW types examined were scooters (47%), followed by road race

replicas (19%), standard street bikes (13%) and commuter bikes (7%). The distribution of PTW motor displacement (engine power) is shown in Table 4. Half the sample were lower powered PTWs (250CC or less).

PTW motor displacement	Proportion of sample
50CC or less	19.8% (n=78)
100-250CC	29.3% (n=115)
251-500CC	8.1% (n=32)
Over 500CC	38.7% (n=152)
Unknown	4.1% (n=16)

**Table 4: Distribution of PTW motor displacement (n=393)**

The overall PTW condition was coded in the data, ranging from excellent to poor. Excellent or good would indicate the vehicle is in a roadworthy condition, with no obvious signs of defect or poor maintenance. In the majority of cases (80%), the condition of the PTW was found to be good or excellent; only 4% of vehicles were considered to be in poor condition, which would indicate an obvious defect. Defects were observed in 5% of vehicles, most commonly the defects related to the tyres, wheel or brake condition. However, these defects were thought to have contributed to the accident in only 2% of the PTW cases.

Regarding bicycles, 132 bicycles were investigated from 130 bicycle 'cases' as some cases involved two bicycles. Of these, 117 were conventional 'pedal' bicycles and 15 were power assisted (pedelecs). Power assisted bicycles were excluded from detailed bicycle analyses as they have subtle but potentially important differences. Mechanical defects in pedal bicycles were generally limited; when found they were most frequently associated with the tyre condition, specifically a worn tread on the tyre (11%-12% of bicycles). The overall condition of the bicycle was described as good or excellent in 72% of cases. In only 1 case were bicycle defects thought to contribute to the accident.

### 3.4 Road user characteristics

The 500 investigated accidents involved 1012 road users, of which 916 (91%) were drivers or riders of the vehicle (n=393 PTW riders, n=132 bicycle riders, n=391 collision opponents). A further 75 (7%) road users were passengers in vehicles, and 21 (2%) were pedestrians; these are generally excluded from analyses unless stated otherwise. PTW riders were highly likely to be male (90%), and two thirds were aged 18-45 (67%). For bicycle riders the gender difference was not as pronounced (68% male), and over half (54%) were over 45 years old.

While most PTW riders used helmets (81%), a non-negligible percentage did not (15%), however it is noted that not all countries require riders to wear a helmet by law. For bicyclists, only 32% of riders were wearing a fastened helmet; 45% were not wearing one at all. Again however, bicycle helmet use is not mandatory in most countries. Headlights were used by the majority of PTW riders (72%). However, only 20% of bicycle riders used lights; a further 22% had lights fitted that were not being used and 36% had no lights fitted at all. Reflective and high conspicuity clothing was not often worn by either PTW riders (13%) or bicycle riders (20%). For both headlights and reflective clothing, it should be noted that the figures do not consider the daylight conditions at the time, and the majority of accidents occurred during daylight hours.

### 3.5 Contributory factors

Contributory factors in more common terminology were derived from the DREAM analyses which use more specialist terms. For example, 'attention allocation' became 'distraction'. Through DREAM and other variables in the database nearly 100 possible contributory factors or subfactors were able to be assigned to any given road user. Analyses were carried out for drivers, riders and pedestrians, but not for passengers as they are not in control of the vehicle. Multiple factors were assigned to each road user in each case; in total for the 500 accidents over 4000 factors were assigned with an average of 4.4 factors per road user. Table 5 below shows the results of a selection of 'human' factors commonly related to road accident causation, split by road user type. 'OIRUs' refer to 'other interacting road users', i.e. drivers of cars / trucks / other vehicles in collision with the PTW or bicycle.

Contributory Factor	Value	Road User		
		PTW Riders (n=393)	Bicycle Riders (n=132)	OIRUs (n=391)
Alcohol*	No	86.8%	84.8%	88.0%



	Yes	4.1%	6.1%	1.5%
	Unknown	9.2%	9.1%	10.5%
<b>Drugs</b>	No	90.6%	92.4%	91.0%
	Yes	3.1%	1.5%	0.5%
	Unknown	6.4%	6.1%	8.4%
<b>Excess Speed</b>	No	54.7%	84.8%	88.5%
	Yes	21.6%	6.8%	3.6%
	Unknown	23.7%	8.3%	7.9%
<b>Fatigue</b>	No	94.9%	89.4%	96.4%
	Yes	2.3%	2.3%	3.1%
	Unknown	2.8%	8.3%	0.5%
<b>Distraction</b>	No	87.5%	75.8%	65.5%
	Yes	9.7%	15.9%	34.0%
	Unknown	2.8%	8.3%	0.5%
<b>Emotional / psychological impairment</b>	No	88.3%	85.6%	93.9%
	Yes	8.9%	6.1%	5.6%
	Unknown	2.8%	8.3%	0.5%
<b>Medical conditions / physical impairment</b>	No	96.2%	88.6%	98.2%
	Yes	1.0%	3.0%	1.3%
	Unknown	2.8%	8.3%	0.5%
<b>Risk-taking behaviour**</b>	No	92.1%	86.4%	98.7%
	Yes	5.1%	5.3%	0.8%
	Unknown	2.8%	8.3%	0.5%
<b>Rider inexperience</b>	No	83.7%	84.8%	95.4%
	Yes	13.5%	6.8%	4.1%
	Unknown	2.8%	8.3%	0.5%
<b>Missed / late observations</b>	No	59.5%	52.3%	33.8%
	Yes	37.7%	39.4%	65.7%
	Unknown	2.8%	8.3%	0.5%
<b>Sight obstruction</b>	No	79.6%	76.5%	71.9%
	Yes	17.6%	15.2%	27.6%
	Unknown	2.8%	8.3%	0.5%

\* Note 1: for the Netherlands a large proportion of the data for alcohol involvement were coded as 'unknown', as police in the Netherlands do not regularly check for alcohol involvement.

\*\* Note 2: factors such as alcohol, drugs and speeding, although also could be considered as risk-taking behaviour, are considered separate to this variable.

**Table 5: Distribution of selected contributory factors according to road user type**

It can be seen that intoxication (alcohol and drug involvement), fatigue, heightened emotions or psychological impairments, medical conditions or physical impairment and risk-taking behaviour were not found to be major contributing factors of the investigated accidents. Each of these were thought to be a contributing factor for less than 10% of road users.

Distraction was more prevalent. In particular, for over a third (34%) of the other interacting road users, distraction immediately prior to the accident contributed to its occurrence, compared to 10% of PTW riders and 16% of cyclists. Distraction could be related to objects / people within the vehicle (e.g. talking to passenger, looking at mobile phone), or outside the vehicle (e.g. focussed on road signs, a friend walking past).

Furthermore, errors of observation, typically described as 'looked but failed to see' accidents were a major factor, being a contributing factor for over a third of PTW and bicycle riders (respectively 38% and 39%), and two thirds of interacting road users (66%). Sight obstructions (such as other vehicles, vegetation or roadside furniture) were also a factor for over a quarter (28%) of interacting road users and may have contributed to some of the errors in observation.

Inexperience as a contributing factor was more prevalent among PTW riders than bicycle riders (respectively 14% and 7%). Inexperience was determined in relation to overall riding experience, familiarity with the specific vehicle ridden, or familiarity with the roads being ridden on. Further analysis was done of the inexperienced PTW riders (n=53). Riders with inexperience as a contributing factor were generally younger, with over half (52%) aged under 25. This is compared with 27% of the total PTW rider sample being in the same age category. Inexperienced riders were also relatively more likely to have speed as a contributing factor compared with all riders (31% compared with 21%).

## Speed

Excess speed was rarely observed to be a major factor for cyclists or other interacting road users (respectively 7% and 4%). However, for 22% of PTW riders excess speed was a contributing factor in the accident. The PTW riders that were identified as having speed as a contributing factor (n=85) were further analysed to determine if there are any trends or commonalities within them.

In the majority of these cases the PTW rider was exceeding the speed limit for the road (71 out of 85 riders), but excess speed was also recorded when the speed was judged to be too fast for the road or weather conditions (n=5 riders speed contributed to the accident but not travelling above the speed limit, n=9 riders speed contributed to the accident but speed limit unknown).

As shown in Table 6 below, the age profile of riders where speed was a contributing factor is younger than the overall sample, indicating younger people have a higher propensity towards risk taking through speeding. Speed is also correlated with increased injury severities, with PTW accidents where speed was a contributing factor leading to a far higher proportion of fatal/serious injury accidents (81% compared with 45% of all accidents) over slight/no injury accidents (12% compared with 41% of all accidents).

Age	All PTW riders (n=393)	PTW riders with speed as a contributing factor (n=85)
0-17	4.6%	7.1%
18-25	21.9%	29.4%
26-35	25.2%	25.9%
36-45	19.3%	14.1%
46-55	15.3%	15.3%
56-65	8.9%	7.1%
>65	3.8%	1.2%
Unknown	1.0%	0.0%
Injury Severity	All PTW accidents (n=385)	PTW accidents with speed as a contributing factor (n=85)
Not injured	5.7%	3.5%
Slight	34.8%	8.2%
Serious	26.8%	31.8%
Fatal	17.9%	49.4%
Unknown	14.8%	7.1%

**Table 6: Age and injury severity of PTW riders for which speed was a contributing factor in the accident (n=85) compared with all riders (n=393)**

## 4. Discussion

### 4.1 Collection of in-depth accident data

The primary outcome of this study was the collection of in-depth investigation data on 500 accidents involving PTWs or bicycles across six European countries. Many of the past research studies have raised issues concerning better understanding of the causation of accidents involving VRUs such as PTWs and bicycles, however many of these, for example the MAIDS study (ACEM, 2009), were carried out some time ago and there is a lack of more recent research investigating PTW and bicycle accidents in detail on a large scale. The value of the current study therefore is that it will enable researchers to gain a more up to date understanding of the nature and causes of PTW and bicycle accidents.

The objective of the study was to gather PTW and bicycle accident data from in-depth accident investigations, obtain accident causation and medical data for those accidents, and to store the information according to an appropriate and efficient protocol enabling an accident causation-oriented analysis. The study showed that the DaCoTA protocols for in-depth accident investigations were successful in securing relevant highly detailed data for describing the nature and circumstances of PTW bicycle accidents.

However, the data collection was not without challenges. Although the target of 500 cases was completed within the time frame of the study, a significant amount of resource was required to achieve this, and some adjustments had to be made to individual team targets and methods of data collection. Ideally an 'on-scene' investigation approach would be used for all cases, as this gives the investigating teams the opportunity to collect more data directly themselves according to the

established protocols, supplementing it with additional interview / medical / vehicle examination data later (either directly or through the emergency services). In the current study the on-scene method worked well when utilised and provided accurate data collection, however it was found to have a high cost and time resource associated with it. Teams trying to collect data on-scene faced a variety of challenges, such as; long times 'on-shift' waiting for a suitable accident to occur, not being able to secure data sharing agreements with all emergency services, not being able to reach the accident location before some of the involved parties had already left the scene, being refused permission to interview all involved parties or examine their vehicles, etc. These challenges potentially result in a case not being included in the sample if all the core data could not be collected, in addition to time lost waiting for accidents to occur, so the number of cases collected does not always reflect the amount of effort expended.

Many teams had to instead use the 'retrospective' approach in order to reach their target within the timeframe. Although not able to attend the accident when it occurred, the teams found that it was still possible to gain a large amount of in-depth data by combining data from multiple sources such as police investigation reports and medical examination reports, and that some data could still be collected directly by the investigation teams at a time after the accident, for example interviews with road users or examinations of vehicles involved. This method also allowed teams to cover a wider sample area than what they could reach directly from their on-scene base within a short time of the accident occurring, and so increased the sample pool. The drawbacks to this approach include reduction in the amount of data collected, preventing for example a full reconstruction in some cases, and also that investigators often have to rely on interpreting second hand information, which may not have been collected with the same purpose in mind. Overall however the retrospective method was found to be more cost-effective, enables better planning and use of staff resources, and does not significantly reduce the quality of the collected data; therefore future studies should consider this method as a good alternative to collecting data directly at the scene if that is not possible.

Finally, issues relating to data protection and privacy, as well as variations in methods or terminology between countries (or different regions within countries) did pose a challenge in collecting harmonised data. The current study highlighted the importance of regular communication between teams through the data collection process to ensure a common understanding was used. Researchers using national datasets to compare accident circumstances between countries face challenges such as incompatible data, missing variables, or unclear definitions. Using a common methodology, in this case the adapted DaCoTA protocols, achieved the aim of generating comparable data between teams, and the output dataset will be valuable in future research to gain insights both within and between countries.

## *4.2 Data sample*

The accident characteristics in the collected sample were in line with those seen in a previous in-depth PTW study, MAIDS (ACEM, 2009), and with similar research on both PTWs and bicycles (Piantini et al., 2016; Beck et al., 2016). Accidents primarily occurred in urban areas, during daylight hours and not in adverse weather. Just under half of the accidents investigated occurred at junctions, which is again in line with previous studies. Relatively more bicycle accidents occurred at junctions when compared with PTWs, however this could be a function of the sample inclusion criteria as only multi-vehicle bicycle accidents were included whereas PTWs could be involved in a single vehicle accident, which often occur outside of junctions.

For both PTWs and bicycles, the characteristics are reported alone and do not consider any exposure data, therefore the results are given solely to describe the sample and do not imply any specific relative risk. Future research could examine the characteristics further, considering exposure and comparing with characteristics of all road user types to identify any significant results in the collected data.

## *4.3 Road user characteristics*

In the current study, the PTW rider sample was dominated by males, and over two thirds were aged under 45. This could be explained due to the desires of each age group, as speed, manoeuvrability and sensation seeking can be said to be the needs of younger people. Conversely, as road-users age, they may seek the comfort of a car, switch to a bicycle or travel on foot, or limit their exposure altogether by taking fewer trips. This was slightly different to the data relating to bicycle riders where two thirds of the sample were male and over half were older than 45. Previous research has found that males are more likely to be involved in a cycling accident (Beck et al., 2016), though this is possibly because of greater use of cyclists by males versus females.

In the accidents investigated, most PTW riders recognised the benefit of helmet use while riding. Haworth and Debnath (2013) found that motorcyclists were more likely to wear a helmet in comparison to cyclists, though this could be related to more legislation being targeted at PTW helmet use. Other research has found that wearing a helmet can reduce injury severity amongst motorcyclists by 70% and reduce the numbers of fatal head injuries by 44% (Elvik, Høye, Vaa & Sorensen, 2009), which supports the view that continued efforts to improve helmet use by PTW riders will be highly beneficial.

Many of the cyclists investigated in this study did not use a cycle helmet. A recent meta-analysis by Høye (2018) found that in the case of a fall or accident, the use of a bicycle helmet was found to reduce serious head/brain injury by 60% and fatal head/brain injury by 71% on average. However, some studies show adverse effects of bicycle helmets on accident involvement (Robinson, 2006; Phillips, Bjørnskau, Hagmand & Sagberg, 2011); due to 'behavioural adaptation' cyclists may feel safer wearing a bicycle helmet and as a result they may show more risky cycling behaviour. Other studies indicate that young helmet wearing cyclists take no additional risks (Hagel & Pless, 2006). It is unclear what this could mean for the safety effects of helmet wearing; several studies contradict each other. Elvik (2013) concludes that there is insufficient clarity on this subject.

#### *4.4 Accident scenarios*

A quarter of the serious or fatal PTW cases analysed involved no other vehicles and two thirds of these were due to the rider losing control on a curve. Loss of control of the PTW was also the third most common accident scenario for multi-vehicle PTW accidents. Combined, these form a large portion of severe outcomes for PTW riders and should be investigated further. Whilst speed is likely to be a factor in a portion of these accidents, it is also recommended to investigate vehicle-based measures to reduce loss of control accidents. See for example Grant et al. (2008), who proposed the implementation of integrated safety systems for a range of PTWs to improve primary safety through handling and stability. Furthermore, Anti-lock Braking Systems (ABS) have been mandatory on European PTWs with engine capacity over 125cc since 2016 and have been shown to reduce fatal accidents by 31% (Teoh, 2013).

Outside of 'loss of control' accidents, the most common scenarios for multi-vehicle PTW accidents involved another road user turning or crossing in front of the PTW. In most of these cases the PTW rider had the right of way and therefore, although PTW speed was also sometimes a factor, the results show that the actions of the other vehicle drivers are more often the critical factor in the accident than the actions of the PTW rider.

The most common cyclist scenarios also involved other road users crossing in front of them, and as rider speed is highly unlikely to be a factor in bicycle accidents, this suggests failure of other vehicle drivers to either detect them or respond appropriately. More research should be aimed at the other road users involved to better understand why they are committing these right of way violations and to identify how these scenarios can be prevented, for example through the use of in-vehicle intelligent technologies to detect PTWs and bicycles and warn drivers of their presence.

#### *4.5 Contributory factors*

The right of way violations may in part be explained by the results seen in the causation analysis. Errors in observation were thought to be a contributory factor for two thirds of the other vehicle drivers analysed and over a third of PTW and bicycle riders. Distraction and sight obstructions were each also prevalent and are likely to have contributed to the observation errors.

Distraction has long been identified as a common factor in road traffic accidents (e.g. Regan, Lee & Victor, 2013), and it is only expected to increase as both the complexity of the road system increases (e.g. smart motorways, advertising, new vehicle types), and the amount of distractions within vehicles increase (e.g. mobile phones, warnings from driver assistance systems, touch-screen entertainment). The data needs to be examined on a case-by-case basis to fully understand the reasons behind the distracted behaviour observed, however even from the aggregated analysis it is clear that more measures are needed to combat distraction, potentially through new legislation or targeted awareness campaigns.

However, distraction or obstructions to view did not account for all the observation errors in the analysis, suggesting that 'looked but failed to see' accidents are a large problem for both PTWs and bicycles. Speed of the PTW will have played a role in some cases, as often car drivers can misjudge the speed of an approaching PTW and believe they have time to complete their turn, but a collision

occurs when the PTW reaches them sooner than expected (Pai, 2011; Davidse et al., 2019). For non-speed related incidents, particularly those involving crossing or turning scenarios, technology countermeasures might be effective in reducing accidents. Research has shown that vehicle technologies such as advanced forward collision warning would be effective in reducing accidents, including those involving PTWs and bicycles (see e.g. Jermakian, 2011).

Improved conspicuity of riders is also proposed as a countermeasure to this issue. In the investigated accidents use of reflective clothing was low, however De Craen, Doumen, Bos and Van Norden (2011) conclude that it is not so much light or reflective clothing that can increase the visibility of motorcyclists, but particularly the contrast with their environment. Research by Gershon, Ben-Asher and Shinar (2012) came to a similar conclusion; in an urban environment with a varied and multi-coloured background a motorcyclist was more conspicuous in white or reflective clothing, and in a rural setting, where the background mainly consisted of a blue sky, a motorcyclist wearing black was more easily noticed. Clarke, Ward, Bartle and Truman (2004) previously highlighted this problem and calculated that if 'looked but failed to see' errors could be eliminated it could result in a reduction of 25% in the total PTW accident rate. The results of the current study show that this problem is still common over a decade later, so it is clear that more research is required urgently to develop countermeasures to help drivers to recognise PTWs and bicycles and respond appropriately.

Aside from distraction, sight obstructions and errors in observation, the causation analysis did not reveal many other common causes. Intoxication, through alcohol or drugs, and fatigue, whilst traditionally known to be factors in road traffic accidents, did not appear commonly in the current study. Vehicle defects were also not prevalent in the current study and the results show that poor maintenance is not a major cause of PTW or bicycle accidents, being a contributing factor for only 2% of PTW accidents and in only one bicycle accident.

PTW rider inexperience was present in a small but potentially significant amount of cases and was generally associated with younger riders. Lack of experience in driving or riding is a commonly studied factor in road accidents (Groeger, 2006), and accidents can result from a lack of situational awareness, lack of experience in avoiding dangerous situations or inability to remedy them when they start to occur. Although not analysed further in the current study, an in-depth review of the cases involving inexperience could give insights into possible countermeasures.

Finally, speed as a contributory factor was analysed and the results show it was predominately the PTW rider that was speeding, not the bicycle rider or interacting road user. Although only a factor for less than a quarter of cases, preliminary analysis showed that contributory speed was correlated to more severe injury outcomes. Much research has been carried out on the benefit of reducing speed on road safety, and the current study supports the view that policies and strategies to reduce speeds would be beneficial in reducing both the number of accidents and their severity. Although the sample was too small to draw statistically significant conclusions, speed being contributory appears to also be correlated with younger inexperienced riders, suggesting that targeted interventions aimed at those groups could be beneficial in reducing accidents.

## 5. Conclusions

The SaferWheels study collected in-depth investigation data relating to 500 PTW or bicycle accidents within the European Union. This data can be further analysed by researchers and policy makers to provide insights into how to improve the safety of these vulnerable groups. Accidents involving powered two wheelers and bicycles remain common on European roads and coordinated strategies should be deployed to reduce fatalities and serious injuries. A harmonised dataset containing investigations from six European countries may help towards this, allowing researchers to identify where road safety policies might benefit all member states, and where different countries will need different approaches.

Initial analysis of the 500 investigations reveals that causation factors such as observation errors, distraction and sight obstructions are particularly prevalent, with 'looked but failed to see' accidents still being a key concern for PTWs and bicycles. Additionally, for PTW riders, there were a small but potentially significant number of cases for which excess speed and/or inexperience was a contributing factor, and these cases could be analysed further to inform potential countermeasures.

Analysis of the accident scenarios showed that single-vehicle loss of control accidents accounted for a quarter of serious and fatally injured PTW riders, therefore measures to reduce these (through road design, rider behaviour or vehicle stability technologies) could result in large benefits for PTW safety.

Outside of these, for both PTW and bicycle riders the most common scenarios involved another vehicle crossing or turning in front of them, supporting the view that in many cases, the actions of the PTW or bicycle rider is not the primary factor in the accident.

Whilst the analysis reported here reveals some interesting findings regarding PTW and bicycle accidents, it should be remembered that such findings are based on aggregated analysis of the collective data to look for trends in accident characteristics and causation. Much more can be gained from an evaluation of each individual investigation on a case-study basis to derive more in-depth insight into specific factors that may be relevant to reducing such accidents, as well as how various factors interact with each other to come together and result in an accident.

## 6. Practical Applications

The results of the SaferWheels study have validated the value of a harmonised approach to accident investigation across the European Union, whilst also identifying difficulties in data collection to guide future research methods. The outcome of the study, a dataset of 500 in-depth accident investigations involving PTWs and bicycles, can be analysed to provide evidence to support policies targeted at reducing road deaths and injuries to vulnerable road users on EU roads.

The SaferWheels dataset is available for analysis upon request from the European Commission.

## 7. References

- Association of European Motorcycle Manufacturers (ACEM) (2009). *MAIDS: In-depth Investigations of Accidents Involving Powered two wheelers, Final report 2.0*. ACEM. <http://www.maids-study.eu/pdf/MAIDS2.pdf>
- Albalade, D. & Fernández-Villadangos, L. (2010). Motorcycle injury severity in Barcelona: the role of vehicle type and congestion. *Traffic injury prevention*, 11(6), 623-631. <https://doi.org/10.1080/15389588.2010.506932>.
- Atalar, D., Talbot, R., & Hill, J. (2012). *Training Package including training manual and draft protocols, Deliverable 2.3 of the EC FP7 project DaCoTA*. European Commission. [http://www.dacota-project.eu/Deliverables/DaCoTA-WP2/DaCoTA\\_D2\\_3\\_training%20materials\\_Final.pdf](http://www.dacota-project.eu/Deliverables/DaCoTA-WP2/DaCoTA_D2_3_training%20materials_Final.pdf)
- Beck, B., Stevenson, M., Newstead, S., Cameron, P., Judson, R., Edwards, E.R., Bucknill, A., Johnson, M. & Gabbe, B. (2016). Bicycling crash characteristics: an in-depth crash investigation study. *Accident Analysis & Prevention*, 96, 219-227. <https://doi.org/10.1016/j.aap.2016.08.012>.
- Boele-Vos, M. J., Van Duijvenvoorde, K., Doumen, M. J. A., Duivenvoorden, C. W. A. E., Louwense, W. J. R., & Davidse, R. J. (2017). Crashes involving cyclists aged 50 and over in the Netherlands: An in-depth study. *Accident Analysis & Prevention*, 105, 4-10. <https://doi.org/10.1016/j.aap.2016.07.016>
- Clarke, D. D., Ward, P., Bartle, C. & Truman, W., (2004). *In-depth study of motorcycle accidents* (Road Safety Research Report No. 54). Department for Transport, UK. <http://www.righttoride.co.uk/virtuallibrary/ridersafety/indepthstudyofmotorcycleacc2004.pdf>
- De Craen, S., Doumen, M., Bos, N. & Van Norden, Y. (2011). *The roles of motorcyclists and car drivers in conspicuity-related motorcycle crashes* (R-2011-25). SWOV. <https://www.swov.nl/en/publication/roles-motorcyclists-and-car-drivers-conspicuity-related-motorcycle-crashes>
- Davidse, R.J., van Duijvenvoorde, K., Boele-Vos, M.J., Louwense, W.J.R., Stelling-Konczak, A., Duivenvoorden, C.W.A.E. & Algera, A.J. (2019). Scenarios of crashes involving light mopeds on urban bicycle paths. *Accident Analysis & Prevention*, 129, 334-341. <https://doi.org/10.1016/j.aap.2019.05.016>.
- Elvik, R., Høy, A., Vaa, T. & Sørensen, M. (2009). *Handbook of Road Safety Measures (2<sup>nd</sup> Edition)*. Bingley, UK: Emerald Group Publishing.
- Elvik, R. (2013). Corrigendum to: "Publication bias and time-trend bias in meta-analysis of bicycle helmet efficacy: A re-analysis of Attewell, Glase and McFadden, 2001" [Accid. Anal. Prev. 43 (2011) 1245–1251]. *Accident Analysis & Prevention*, 60, 245-253. <https://doi.org/10.1016/j.aap.2012.12.003>

European Transport Safety Council (ETSC) (2020). *How Safe is Walking and Cycling in Europe?* (PIN Flash Report 38). Brussels: Dovelé Adminaité-Fodor & Graziella Jost. [https://etsc.eu/wp-content/uploads/PIN-Flash-38\\_FINAL.pdf](https://etsc.eu/wp-content/uploads/PIN-Flash-38_FINAL.pdf)

European Commission (EC) (2018). *Annual Accident Report 2018*. European Commission, Directorate General for Transport. [https://ec.europa.eu/transport/road\\_safety/sites/roadsafety/files/pdf/statistics/dacota/asr2018.pdf](https://ec.europa.eu/transport/road_safety/sites/roadsafety/files/pdf/statistics/dacota/asr2018.pdf)

Gershon, P., Ben-Asher, N. & Shinar, D. (2012). Attention and search conspicuity of motorcycles as a function of their visual context. *Accident Analysis & Prevention*, *44*(1), 97-103. <https://doi.org/10.1016/j.aap.2010.12.015>

Grant, R., Frampton, R., Peldschus, S., Schuller, E., StClair, V., McCarthy, M., ... & Savino, G. (2008). PISa: powered two-wheeler integrated safety: project objectives, achievements and remaining activities. In *International Motorcycle Conference, 7th, 2008, Essen, Germany* (No. 13).

Groeger, J. (2006). Youthfulness, inexperience, and sleep loss: the problems young drivers face and those they pose for us. *Injury Prevention*, *12*(Suppl 1), 19–24. <http://dx.doi.org/10.1136/ip.2006.012070>

Hagel, B.E. & Pless, B. (2006). A critical examination of arguments against bicycle helmet use and legislation. *Accident Analysis & Prevention*, *38*(2), 277-278. <https://doi.org/10.1016/j.aap.2005.09.004>

Haworth, N. (2012). Powered two wheelers in a changing world- Challenges and opportunities. *Accident Analysis & Prevention*, *44*(1), 12-18. <https://doi.org/10.1016/j.aap.2010.10.031>

Haworth, N., and Debnath, A.K. (2013). How similar are two-unit bicycle and motorcycle crashes? *Accident Analysis & Prevention*, *58*, 15-25. <https://doi.org/10.1016/j.aap.2013.04.014>

Hollnagel, E. (1998) *Cognitive Reliability and Error Analysis Method: CREAM*. Oxford, UK: Elsevier Science Ltd.

Høye, A. (2018). Bicycle helmets – To wear or not to wear? A meta-analysis of the effects of bicycle helmets on injuries. *Accident Analysis & Prevention*, *117*, 85-97. <https://doi.org/10.1016/j.aap.2018.03.026>

Jermakian, J.S. (2011). Crash avoidance potential of four passenger vehicle technologies. *Accident Analysis & Prevention*, *43*(3), 732-740. <https://doi.org/10.1016/j.aap.2010.10.020>

Ljung, M. (2002). *DREAM – Driving Reliability and Error Analysis Method* (Master's thesis). Linköping University: Linköping. <https://www.diva-portal.org/smash/get/diva2:19361/FULLTEXT01.pdf>

Ljung, M. (2007). *Manual for SafetyNet Accident Causation System (SNACS) v1.2*. In Reed, S. G. & Morris, A. P. (2008). Glossary of Data Variables for Fatal and accident causation databases - Deliverable 5.5 of the EC FP6 project SafetyNet. <http://erso.swov.nl/safetynet/fixd/WP5/D5.5%20Glossary%20of%20Data%20variables%20for%20Fatal%20and%20accident%20causation%20databases.pdf>

Ljung, M., Habibovic, A., Tivesten, S. Sander, J., Bargman, J. & Engstrom, J. (2012). *Manual for DREAM v3.2*. DaCoTA, EC. [https://dacota-investigation-manual.eu/uploads/DREAM\\_32.pdf](https://dacota-investigation-manual.eu/uploads/DREAM_32.pdf)

Morris, A.P., Brown, L.A., Thomas, P., Davidse, R.J., Phan, V., Margaritis, D., Usami, D., Robibaro, N., Krupińska, A., Sicińska, K., Ziakopoulos, A., Theofilatos, A. & Yannis, G. (2018). *SAFERWHEELS Study on Powered Two-Wheeler and Bicycle Accidents in the EU - Final Report*. European Commission, Directorate General for Mobility and Transport. <https://doi.org/10.2832/138260>

Pai, C. W., & Saleh, W. (2007). An analysis of motorcyclist injury severity under various traffic control measures at three-legged junctions in the UK. *Safety science*, *45*(8), 832-847. <https://doi.org/10.1016/j.ssci.2006.08.021>

Pai, C. W. (2011). Motorcycle right-of-way accidents—A literature review. *Accident Analysis & Prevention*, *43*(3), 971-982. <http://doi.org/10.1016/j.aap.2010.11.024>

Phan, V., Regan, M., Moutreuil, M., Minton, R., Mattsson, M., & Leden, L. (2010). Using the driving reliability and error analysis method (DREAM) to understand powered two-wheeler accident causation. In *International Conference on Safety and Mobility of Vulnerable Road Users: Pedestrians, Motorcyclists and Bicyclists*. Jerusalem.

- Phillips, R. O., Bjørnskau, T., Hagman, R., & Sagberg, F. (2011). Reduction in car–bicycle conflict at a road–cycle path intersection: Evidence of road user adaptation?. *Transportation research part F: traffic psychology and behaviour*, 14(2), 87-95. <https://doi.org/10.1016/j.trf.2010.11.003>
- Piantini, S., Pierini, M., Delogu, M., Baldanzini, N., Franci, A., Mangini, M., & Peris, A. (2016). Injury Analysis of Powered Two-Wheeler versus Other-Vehicle Urban Accidents. In *Proceedings of IRCOBI Conference. Malaga, Spain*.
- Räsänen, M., & Summala, H. (1998). Attention and expectation problems in bicycle–car collisions: an in-depth study. *Accident Analysis & Prevention*, 30(5), 657-666. [https://doi.org/10.1016/S0001-4575\(98\)00007-4](https://doi.org/10.1016/S0001-4575(98)00007-4)
- Regan, M.A., Lee, J. D. & Victor, T.W. (2013). *Driver Distraction and Inattention: Advances in Research and Countermeasures* (Vol. 1). FL, USA: CRC Press.
- Robinson, D. L. (2006). No clear evidence from countries that have enforced the wearing of helmets. *British Medical Journal*, 332(7543), 837. <https://doi.org/10.1136/bmj.332.7545.837-a>
- Schepers, P., Stipdonk, H., Methorst, R., & Olivier, J. (2017). Bicycle fatalities: trends in crashes with and without motor vehicles in The Netherlands. *Transportation research part F: traffic psychology and behaviour*, 46, 491-499. <https://doi.org/10.1016/j.trf.2016.05.007>
- Teoh, E. R. (2013) *Effects of Antilock Braking Systems on Motorcycle Fatal Crash Rates: An Update*. Insurance Institute for Highway Safety, USA. <https://www.iihs.org/topics/bibliography/ref/2042>
- Theofilatos, A., & Ziakopoulos, A. (2018). Examining Injury Severity of Moped and Motorcycle Occupants with Real-Time Traffic and Weather Data. *Journal of Transportation Engineering, Part A: Systems*, 144(11), 04018066. <https://doi.org/10.1061/JTEPBS.0000193>
- Tripodi, A., & Persia, L. (2015). Impact of e-safety applications on cyclists' safety. *International journal of injury control and safety promotion*, 22(4), 377-386. <https://doi.org/10.1080/17457300.2014.940353>
- Van Elslande, P. & Elvick, R. (2012). Powered two-wheelers within the traffic system. *Accident Analysis and Prevention*, 49, 1-4. <https://doi.org/10.1016/j.aap.2012.09.007>
- Wallén Warner, H., Ljung, M., Sandin, J., Johansson, E., & Björklund, G. (2008). *Manual for DREAM 3.0, Driving Reliability and Error Analysis Method. Deliverable D5. 6 of the EU FP6 project SafetyNet, TREN-04-FP6TRSL2. 395465/506723*. Chalmers University of Technology.
- Wegman, F., Zhang, F., & Dijkstra, A. (2012). How to make more cycling good for road safety? *Accident Analysis & Prevention*, 44(1), 19-29. <https://doi.org/10.1016/j.aap.2010.11.010>
- Ziakopoulos, A., Theofilatos, A., Yannis, G., Margaritis, D., Thomas, P., Morris, A., Brown, L., Robibaro, M., Usami, D.S., Phan, V., Davidse, R., & Butler I. (2018). A preliminary analysis of in-depth accident data for powered two-wheelers and bicycles in Europe. In *International Research Council on the Biomechanics of Injury (IRCOBI)*. Athens, Greece.



## Appendix A – Accident Scenario Descriptions

Accident Scenario	Description
C1	<ul style="list-style-type: none"> <li>• PTW/bicycle driving straight</li> <li>• Opponent vehicle crossing the PTW/bicycle path from the right side</li> </ul>
C2	<ul style="list-style-type: none"> <li>• PTW/bicycle driving straight</li> <li>• Opponent vehicle crossing the PTW/bicycle path from the left side</li> </ul>
T5	<ul style="list-style-type: none"> <li>• PTW/bicycle turning to the left, crossing the (straight) opponent vehicle path</li> <li>• Opponent vehicle is riding straight in the same direction as the heading of the PTW/bicycle before turning</li> </ul>
T7	<ul style="list-style-type: none"> <li>• Opponent vehicle turning to the left, crossing the (straight) PTW/bicycle path</li> <li>• PTW/bicycle coming from the opposite direction, riding straight</li> </ul>
T8	<ul style="list-style-type: none"> <li>• Opponent vehicle turning to the right, crossing the (straight) PTW/bicycle path</li> <li>• PTW/bicycle coming from the opposite direction, riding straight</li> </ul>
T10	<ul style="list-style-type: none"> <li>• Opponent vehicle turning to the left, crossing the (straight) PTW/bicycle path</li> <li>• PTW/bicycle is riding straight, coming from the left side of the opponent vehicle</li> </ul>
T11	<ul style="list-style-type: none"> <li>• Opponent vehicle turning to the right, crossing the (straight) PTW/bicycle path</li> <li>• PTW/bicycle is riding straight, coming from the left side of the opponent vehicle</li> </ul>
T13	<ul style="list-style-type: none"> <li>• Opponent vehicle turning to the left, crossing the (straight) PTW/bicycle path</li> <li>• PTW/bicycle is riding straight in the same direction as the heading of the opponent vehicle before turning</li> </ul>
L1	<ul style="list-style-type: none"> <li>• Opponent vehicle and PTW/bicycle driving in the same direction</li> <li>• PTW/bicycle is riding straight and hit by the opponent vehicle (going straight) from the rear</li> </ul>
L2	<ul style="list-style-type: none"> <li>• Opponent vehicle and PTW/bicycle driving in the same direction</li> <li>• Opponent vehicle is swerving to the left in front of the PTW/bicycle and hit by the PTW/bicycle</li> </ul>
L6	<ul style="list-style-type: none"> <li>• Opponent vehicle and PTW/bicycle driving in the same direction</li> <li>• PTW/bicycle is riding straight and hit by the opponent vehicle (turning left) from the rear</li> </ul>
L7	<ul style="list-style-type: none"> <li>• Opponent vehicle and PTW/bicycle driving in the same direction</li> <li>• Opponent vehicle is swerving to the right in front of the PTW/bicycle and hit by the PTW/bicycle</li> </ul>
L8	<ul style="list-style-type: none"> <li>• Opponent vehicle and PTW/bicycle driving in the same direction</li> <li>• Opponent vehicle is u-turning from the right to the left in front of the PTW/bicycle and hit by the PTW/bicycle</li> </ul>
LoCC	<ul style="list-style-type: none"> <li>• The driver of the PTW/bicycle loses the control of their vehicle, on a curve, and crashes an opponent vehicle</li> </ul>
Oth	<ul style="list-style-type: none"> <li>• All other scenarios that are not covered by any of the previously described scenarios.</li> </ul>